


METHOD OF HANDLING TRAFFIC — 20 MPH

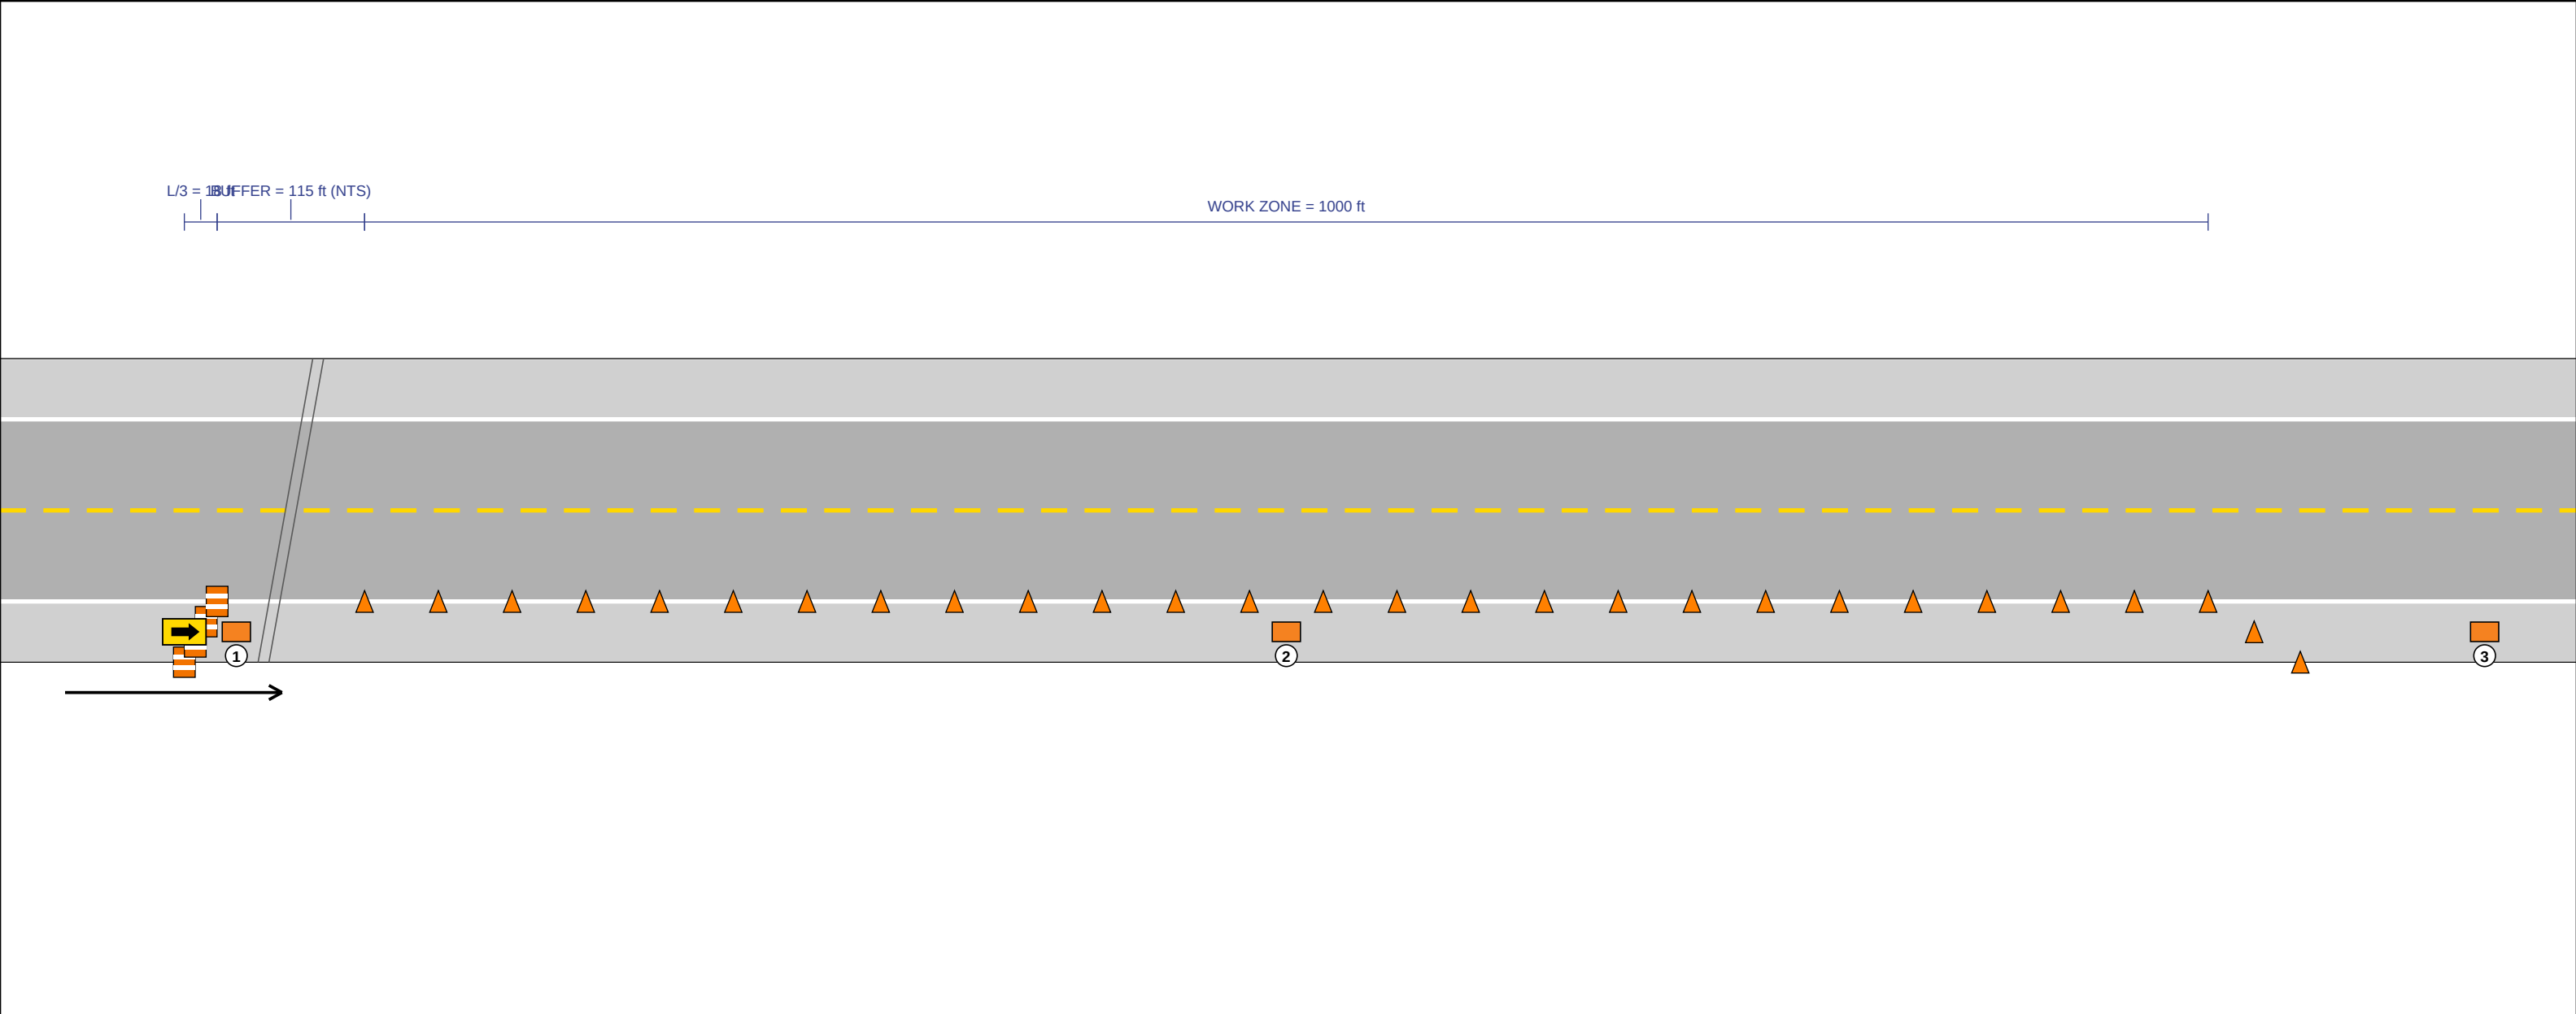

LEGEND

- Arrow Board
- Traffic Cone (28-inch)
- Channelizing Drum
- Warning sign (W series, e.g. W20-1)
- Construction guide (G series, e.g. G20-2)

SIGN CATEGORIES

NOTES & SIGN SCHEDULE

PARAMETERS			
Speed limit:	20 mph	Closure:	Shoulder Closure
Work zone:	1000 ft	Shoulder taper (L/3):	18 ft
Buffer:	115 ft		
SIGN SCHEDULE			
#	CODE	DESCRIPTION	
1	G20-1	ROAD CONSTRUCTION (NEXT 1000 FT)	
2	G20-5P	CONSTRUCTION ZONE plaque	
3	G20-2	END ROAD WORK	
ADVANCE WARNING SIGNS (off-page upstream of taper)			
CODE	DESCRIPTION	DISTANCE	
W21-5aR	RIGHT SHOULDER CLOSED AHEAD	100 ft	
W20-2	ROAD WORK 200 FT	200 ft	
W20-1	ROAD WORK AHEAD	300 ft	

Reference: CDOT S-630-1, MUTCD 11th Ed. Part 6 (effective 2026-01-18), Colorado Supplement.
GENERATED BY CONESTRUCT — DRAFT FOR PE REVIEW. NOT A SEALED PLAN.
Verify all dimensions before use.

TRAFFIC CONTROL DEVICE SUMMARY

MUTCD	DEVICE	QTY
G20-1	ROAD CONSTRUCTION (NEXT 1000 FT)	1
G20-2	END ROAD WORK	1
G20-5P	CONSTRUCTION ZONE plaque	1
W20-1	ROAD WORK AHEAD	1
W20-2	ROAD WORK 200 FT	1
W21-5aR	RIGHT SHOULDER CLOSED AHEAD	1
—	36-inch channelizing drum with alternating orange/white stripes	4
—	Traffic Cone (28-inch)	28
—	Trailer-mounted flashing arrow board (Type A, B, or C)	1

TOTAL DEVICES 39

SEE DEVICE LIST (XLSX) FOR BID QUANTITIES.

PROJECT:	Untitled Project
LOCATION:	Lookout Mountain Road, Golden, CO
COORDINATES:	39.74231, -105.23925
MHT TYPE:	SHOULDER CLOSURE — 2-LANE UNDIVIDED
MUTCD:	TA-3
CDOT:	S-630-1
SCALE:	1" = 85 ft
DATE:	2026-08-04
SHEET:	1 OF 2
AERIAL:	See page 2
DRAWN BY:	MHT Tool (auto-generated)
STATUS:	DRAFT — Not for stamping

Scale 1" = 85 ft applies to the work zone + taper. Buffer compressed; lateral offset exaggerated.

AERIAL CONTEXT



SITE: Lookout Mountain Road, Golden, CO

39.74231, -105.23925

Work zone (1,000 ft) shown in orange. Advance warning, taper, and buffer not depicted. Mapbox satellite imagery with street labels — for context only. Not a survey product. Verify all field conditions on site.

CORRIDOR DETAILS

Anchor:	39.74231, -105.23925
Bearing:	172°
Total corridor:	1,533 ft (0.29 mi)
Advance warning:	300 ft
Taper:	18 ft
Buffer:	115 ft
Work zone:	1,000 ft
Downstream:	100 ft
Centerline:	OSM, full corridor