METHOD OF HANDLING TRAFFIC · Audit F17 · 25 MPH

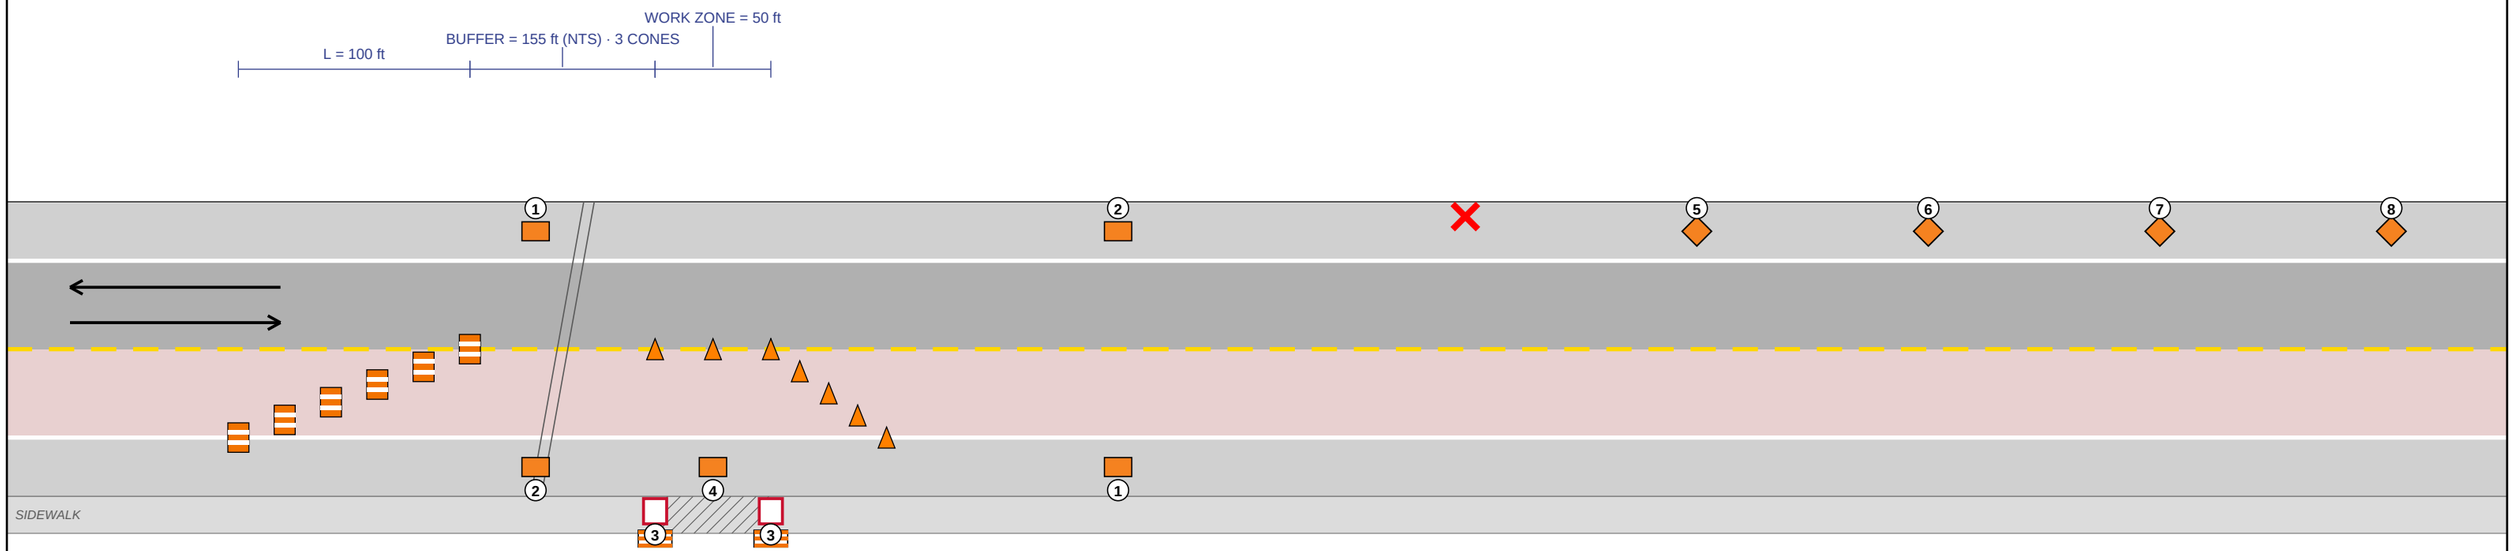

LEGEND

- Type III Barricade
- Traffic Cone (28-inch)
- Channelizing Drum
- Flagger Station

SIGN CATEGORIES

- Warning sign (W series, e.g. W20-1)
- Construction guide (G series, e.g. G20-2)
- Regulatory sign (R series, e.g. R9-9)

SITE CONTEXT

- Sidewalk (hatched within work zone = closed)

Scale 1" = 65 ft applies to the work zone + taper. Buffer compressed; lateral offset exaggerated.

NOTES & SIGN SCHEDULE

PARAMETERS

Speed limit:	**25 mph**	Closure:	**Flagger Alternating Traffic**
Work zone:	**50 ft**	One-lane two-way taper:	**100 ft**
Buffer:	**155 ft**		

SIGN SCHEDULE

#	CODE	DESCRIPTION
1	**G20-2**	END ROAD WORK
2	**G20-1**	ROAD CONSTRUCTION (NEXT 50 FT)
3	**R9-9**	SIDEWALK CLOSED
4	**G20-5P**	WORK ZONE plaque
5	**W20-7**	FLAGGER AHEAD
6	**W3-4**	BE PREPARED TO STOP
7	**W20-4**	ONE LANE ROAD AHEAD
8	**W20-1**	ROAD WORK AHEAD

ADVANCE WARNING SIGNS & FLAGGER STATIONS (off-page upstream of taper)

CODE	DESCRIPTION	DISTANCE
—	FLAGGER STATION #1 (APPROACH)	100 ft
W20-7	FLAGGER AHEAD	200 ft
W3-4	BE PREPARED TO STOP	300 ft
W20-4	ONE LANE ROAD AHEAD	400 ft
W20-1	ROAD WORK AHEAD	500 ft

TRAFFIC CONTROL DEVICE SUMMARY

MUTCD	DEVICE	QTY
G20-1	ROAD CONSTRUCTION (NEXT 50 FT)	2
G20-2	END ROAD WORK	2
G20-5P	WORK ZONE plaque	1
R9-9	SIDEWALK CLOSED	2
W20-1	ROAD WORK AHEAD	2
W20-4	ONE LANE ROAD AHEAD	2
W20-7	FLAGGER AHEAD	2
W3-4	BE PREPARED TO STOP	2
—	36-inch channelizing drum with alternating orange/white stripes	6
—	Traffic Cone (28-inch)	10
—	Type III barricade: three horizontal striped rails, full lane width	2
—	Flagger position with STOP/SLOW paddle and PPE	2
—	Arrow Board (caution mode only)	1
TOTAL DEVICES		**36**

SEE DEVICE LIST (XLSX) FOR BID QUANTITIES.

PROJECT:	Audit F17
LOCATION:	—
COORDINATES:	39.72650, -104.97525
MHT TYPE:	FLAGGER ALTERNATING TRAFFIC · 2-LANE UNDIVIDED
MUTCD:	TA-10
CDOT:	S-630-1
SCALE:	1" = 65 ft
DATE:	2026-10-24
SHEET:	1 OF 1
DRAWN BY:	MHT Tool (auto-generated)
STATUS:	**DRAFT: Not for stamping**

Reference: CDOT S-630-1, MUTCD 11th Edition Part 6, Colorado Supplement (effective January 18, 2026).

GENERATED BY CONESTRUCT. DRAFT FOR PE REVIEW. NOT A SEALED PLAN.

Verify all dimensions before use.